

**ENG**

**Electrical connection**


- 1. Electrical connection: Cable H07RN-F 5G6mm² 3m
- 2. Alternative connection

**Water connection**

- 3. Standard: Warm water 50-65° Ext. thread R1/2" 10l/min 0.2 Bar
- 3. Option Eco Flow: Cold water 5-12° Ext. thread R1/2" 10l/min 0.2 Bar
- 4. Option Eco Flow: Warm water 50-65° Ext. thread R1/2" 10l/min 0.2 Bar

**Miscellaneous**

- 5. Drain: Ø50 3l/s capacity
- 6. Option Drain pump: Flexible hose 2m Ø22
- 7. Detergent cap
- 8. Exhaust Eco Flow

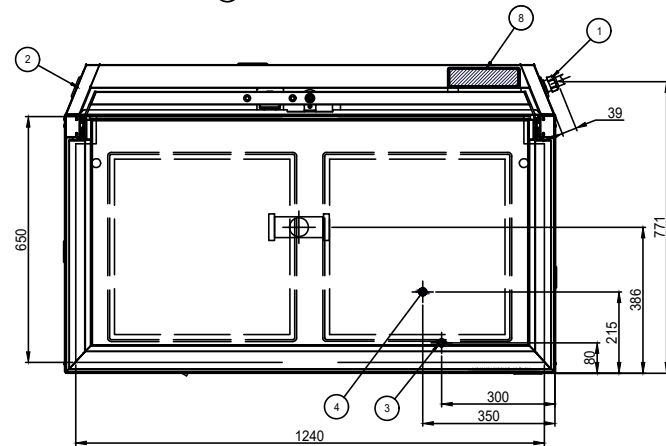

Vers.	Muutos:	Pvm.	Suun.
<p>Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty.          This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.</p>			
Suun.	<a href="http://www.metos.com">www.metos.com</a>	Kaupalliset asiat:	Työmaa-asiat:
Suhde:	1: 20 A4	Proj.no	Tarj./lausunto. Pvm. 04.01.2023
		Nimitys	
		WD-12S	
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Piir.no <span style="font-size: 24pt; font-weight: bold;">4246170</span>	Lehti