


RECOMMENDED TABLE TOP INSTALLATION EXAMPLE:  
 ->USE STAINLESS STEEL L-PROFILE AND DRILL HOLES TROUGH SIDEPANELS OF THE BISTRO GRIDDLE.  
 ->USE RIVETS TO FASTEN THE GRIDDLE.

NOTE: SHIPYARD INSTALLATION, NOT METOS DELIVERY.

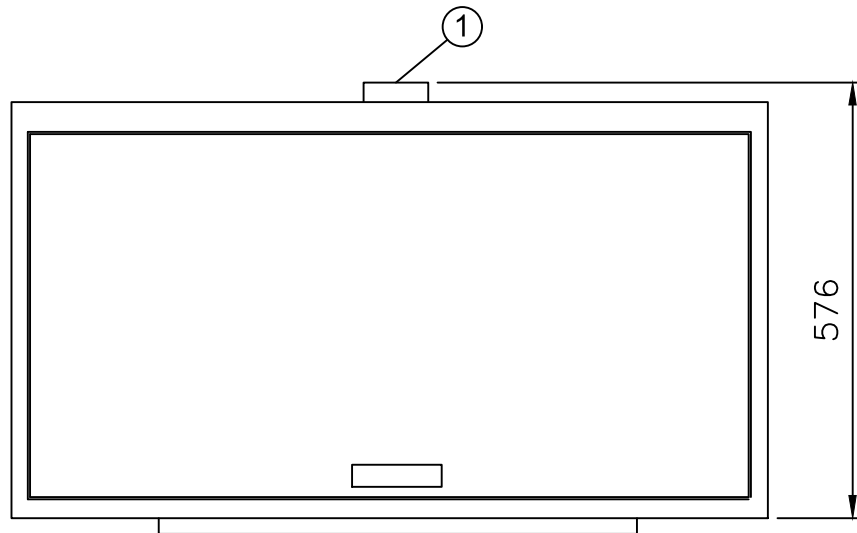

① Electrical connection: Semi-fixed, cable gland PG16, cable length 2m.

Code	Electric supply	P/kW	I/A	Fuse/A
4160048	3PE AC 440V 60Hz	12	15,7	20
4160047	3PE AC 400V 50Hz	12	17,3	20
4160048MO	3PE AC 480V 60Hz	12	14,4	16

Vers. Ind.	Muutos/Alteration:	Pvm. Date	Suun. Design.
Tämä piirustus on Metos Oy Ab:n omaisuutta, kopiointi tai osittainenkin jäljentäminen ilman Metos Oy Ab:n lupaa on ehdottomasti kielletty. This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.			
Suhteet/Scale:	1: 10 A4	Suun. Design. <a href="http://www.metos.com/">www.metos.com/</a>	Tarj./lisänumero. Inq./order nr. Pvm. Date 10.10.2013
<b>metos</b>		Nimitys Name Frytop Metos Bistro B-3000	
Metos Oy Ab FI-04220 KERAVA Tel: 0204 39 13 Fax: 0204 39 4432		Proj.no	Piir.no Dwg.no. Vers.Ind. Lähti Page