Futura HD 150 Brattpan

Model – Futura HD 150 code 3756283

Metos Cooking Solutions
Ahjonkaarre, FI-04220 Kerava, Finland
Tel. +358 204 3913
mcs@metos.com
mcs.metos.com

Standard features

- Elevated control pillar
- Temperature control to 250°C
- 2-zone heating
- 2x Electric tilting motor
- Depth 273mm
- 3GN format
- Insulated and balanced lid
- Rounded corners of inner pan
- Emergency all stop control button

Options

- Water filling to pan
- Recoiled hand-shower
- Strainer plate
- Wired remote control for tilting with IPX6 protection degree

Materials

- Construction of AISI 304 and 430 stainless steel
- Stainless steel frying surface
- Aluminum encased flat heating elements
- Control panel protection class IPX5

Volume

Futura HD 150	
Net volume	150 L
Brut volume	170 L
Frying surface	0.59 m^2
Weight	320 kg

Electrical connection

Futura HD 150	Connected power/kW	Amp
3/N/PE AC 400V 50/60Hz	27.6 kW	50A

Water connection

Futura HD 150	
Cold water connection	G3/4" male

Futura HD 150 Brattpan

Dimensions

1. Electrical connection. Cable gland PG29 for electrical supply cable. Reserve 1.0 meter of cable above floor level.
2. Cold water connection G3/4" male, one-way valve must be fitted. Valve not included in the delivery.
9. Floor drain

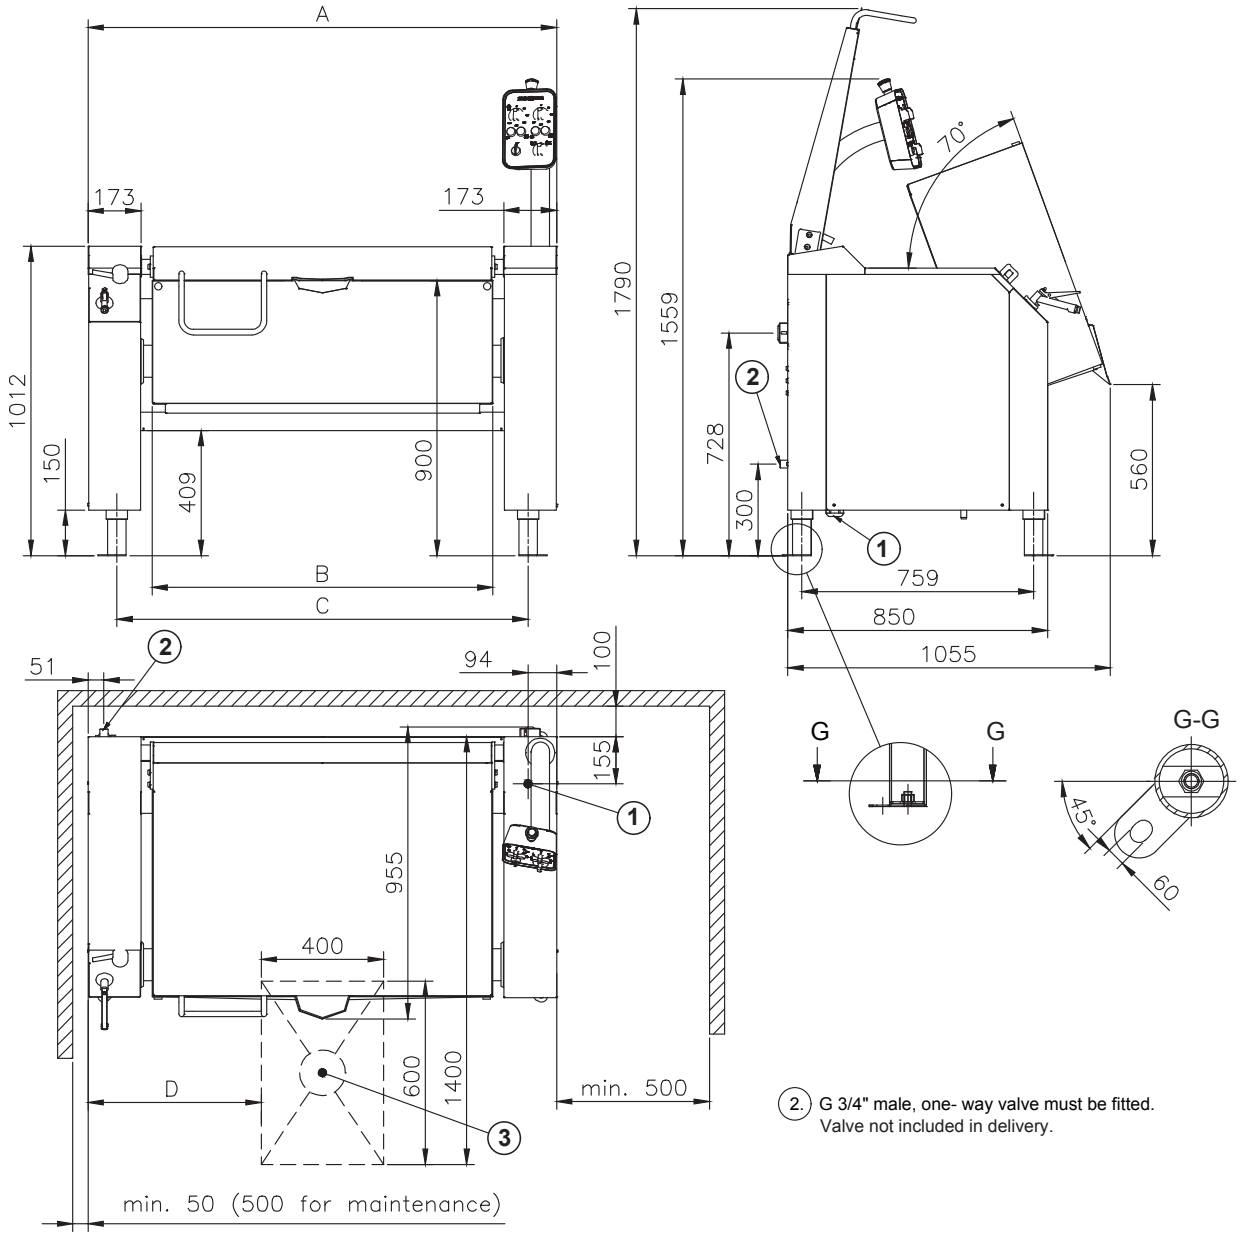

2. G 3/4" male, one- way valve must be fitted. Valve not included in delivery.

Metos	A	B	C	D
Futura HD 150	1533	1115	1345	567

National and local regulations must be observed when installing the pan.

an Ali Group Company

The Spirit of Excellence

Rev 10.12.2025