Viking 60 litres

Safe and reliable cooking kettle

STEAM MG4224122

Metos Cooking Solutions
Ahjonkaarre, FI-04220 Kerava, Finland
Tel. +358 204 3913
mcs@metos.com
mcs.metos.com

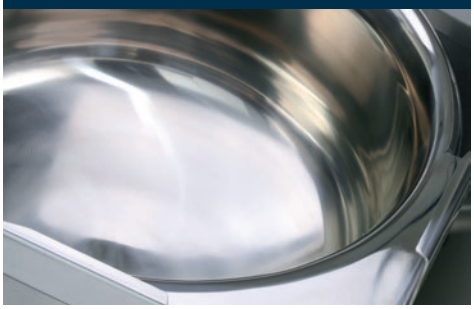

Standard features kettle without mixer

- Elevated control pillar with selected features
- Tilting height 600 mm
- Electric tilting
- Measuring stick

Wide range of accessories available.

Options

- Frames for fixed installation (custom heights on request)
- Free standing kettles with feet
- Cooking bowl cover plates welded and seamless with closed cell polyurethane foam insulation
- Alternative operating voltages
- Food temperature display
- Automatic measured food water filling
- Manual or automatic cooling with tap water
- Steam jacket automatic fill
- Connection to external HACCP system
- Hand showers, Standard, Reel-in or Heavy Duty
- Draw off valves and taps

Materials

- Construction stainless steel (EN1.4301, EN1.4404)
- Inner surface acid proof stainless steel
- Protection class IPX5

Volumes

Viking	Brut L	Net L	Spare volume L
60	68	60	8

Heat load

Viking	Total kW	Sensible kW	Latent kW
60	10.5	2.6	0.6

Viking 60 litres

A. Electrical connections from rear

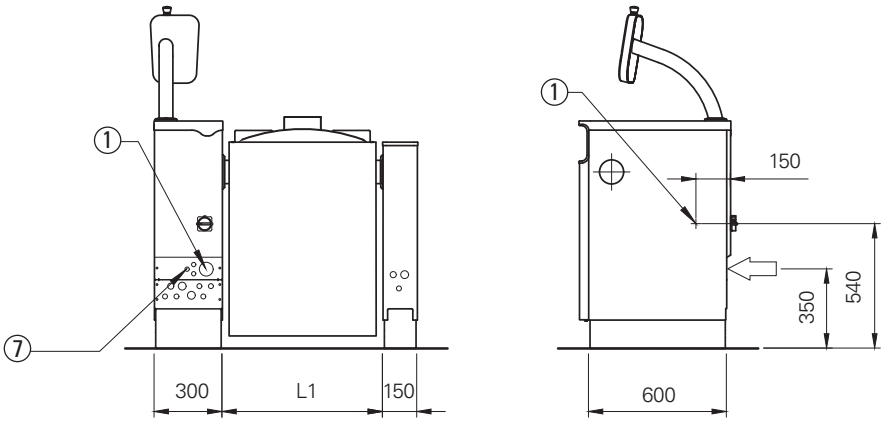

B. Electrical connections from below

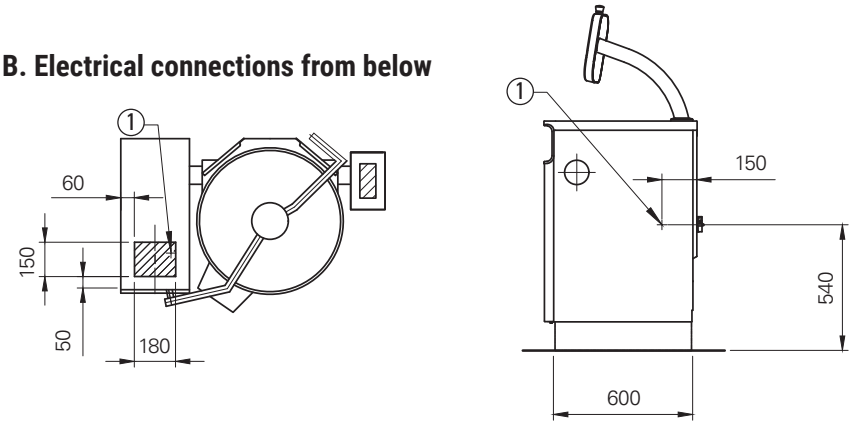

1. Electrical connection, PG21/PG36/PG48 gland
7. HACCP cabling (option)

A. Water and steam connections from rear

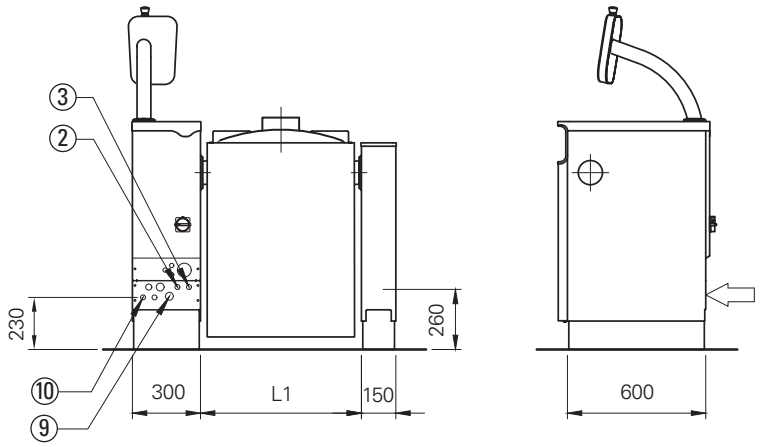

B. Water and steam connections from below

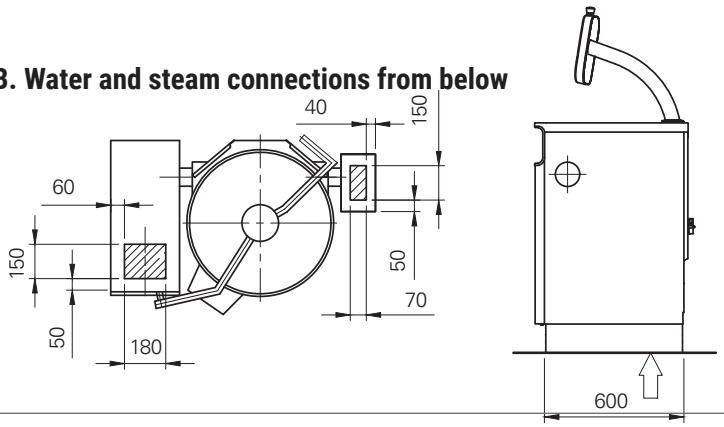

2. Cold water connection R1/2" (ø15), to be fitted with non-return valve and shut off valve
3. Hot water connection R1/2" (ø15), to be fitted with non-return valve and shut off valve (option)
9. Steam connection R3/4" / R1" / R1 1/4" (option)
10. Condensate outlet R1/2" / R3/4" (option)

Viking 60 litres

Electrical connections, STEAM heated kettles

Viking	Connected power/kW	Current A	Fuse 3xA
60S	0.8	3	10

1/N/PE AC 230V 50/60Hz

Steam connection

Viking	Connection		Outlet
60S	R3/4"	18 kg/h	R1/2"

Steam supply recommendations

1. Pressure reducing valve
2. Safety valve
3. Manometer
4. Shut off valve
5. Filter
6. Non-return valve (in the case device is with cooling)
7. Non-return valve (0 bar)
8. Condensate remover

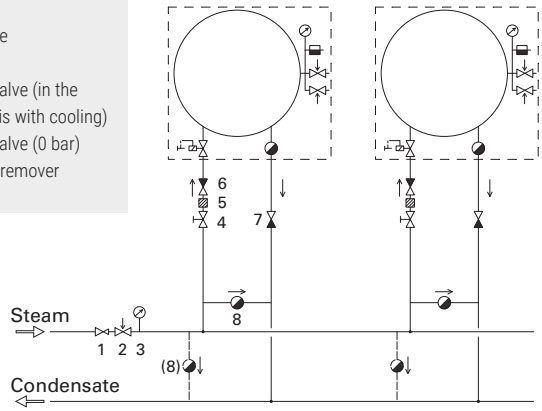

Group installation connections

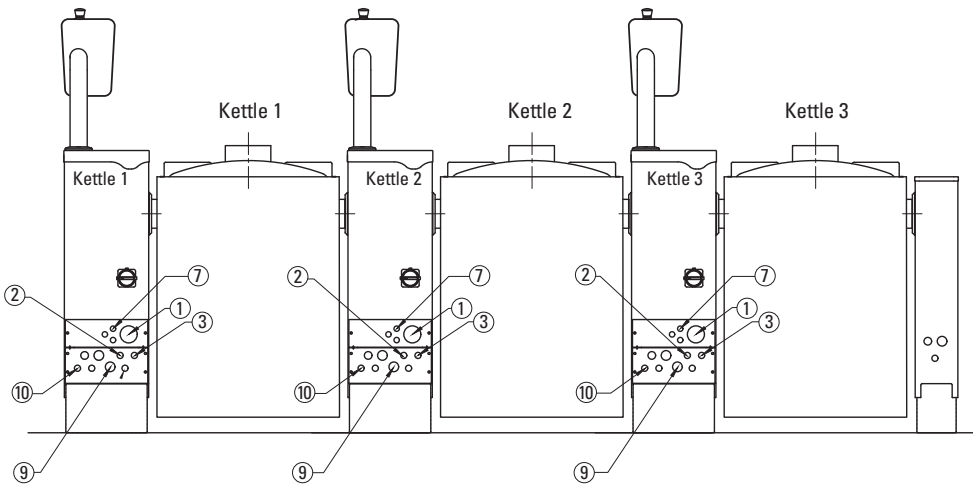

1. Electrical connection, PG21/PG36/PG48 gland
2. Cold water connection R1/2" (ø15), to be fitted with one way valve and shut off valve
3. Hot water connection R1/2" (ø15), to be fitted with one way valve and shut off valve (option)
7. HACCP cabling (option)
9. Steam connection R3/4" / R1" / R1 1/4"· (option)
10. Condensate outlet R1/2" / R3/4" (option)

Viking 60 litres

Dimensions

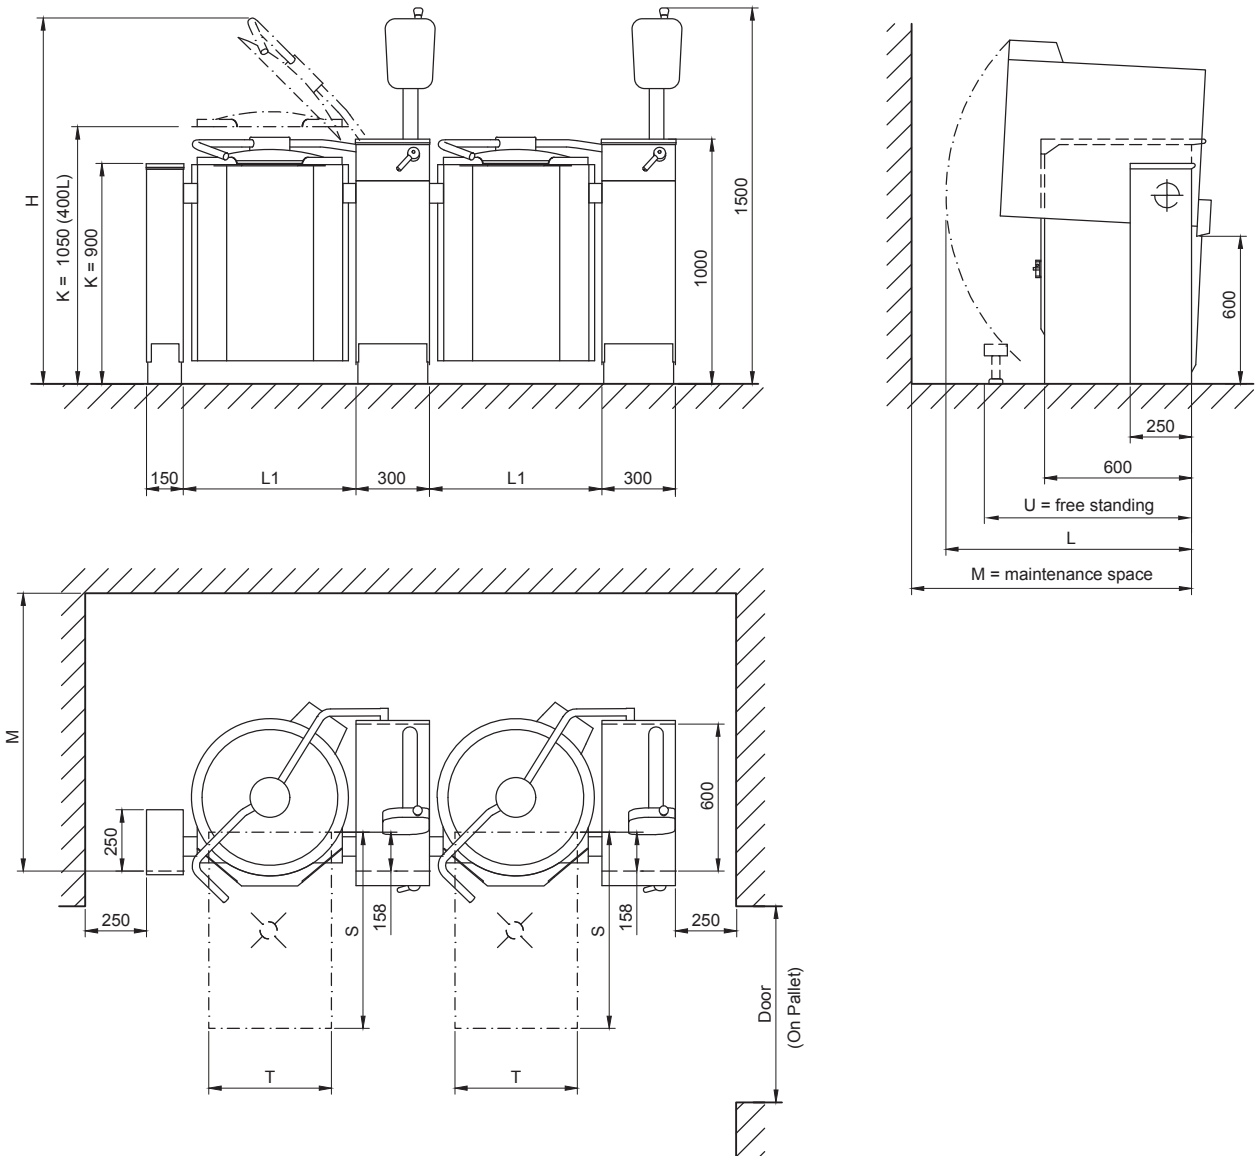

Viking	L1 (mm)	H (mm)	K (mm)	L (mm)	M (mm)	S (mm)	T (mm)	U (mm)	Door (mm)	(On Pallet) Size varies according to installation frame	Weight Viking (kg)
60	594	1740	900	1010	1180	800	400	860	800	(900-1100)	165

National and local regulations must be observed when installing the kettle.